


ASSEMBLY INSTRUCTIONS

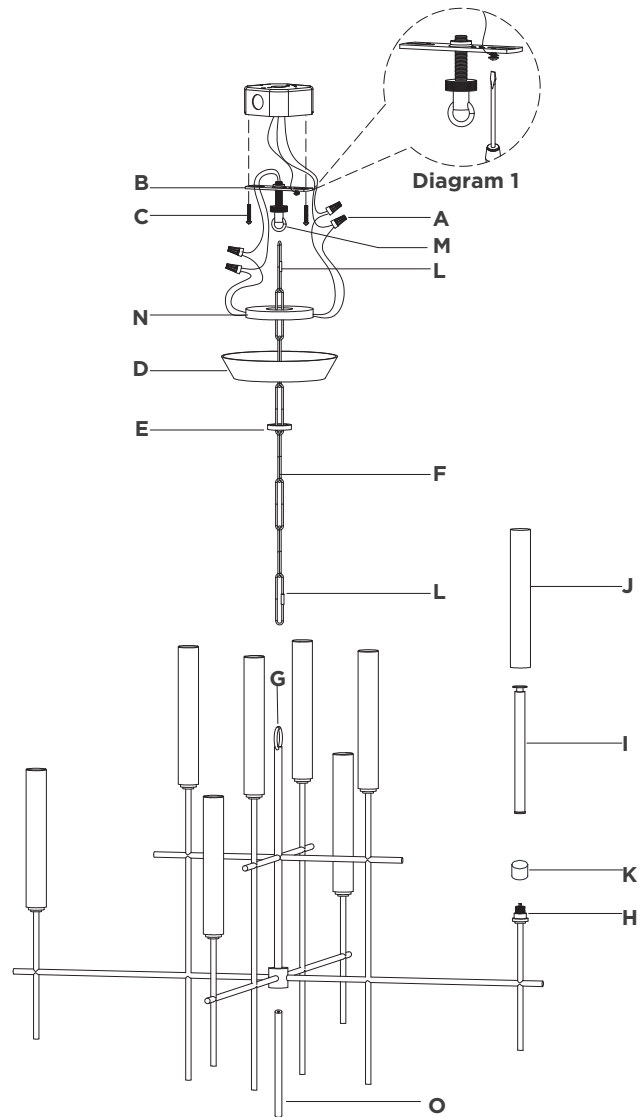

Fay 32" Chandelier

Item # IKF5110

WE RECOMMEND INSTALLATION OF THIS LIGHTING FIXTURE BE DONE BY A LICENSED ELECTRICIAN.

WARNING*SWITCH OFF THE MAIN ELECTRICAL SUPPLY FROM THE MAIN FUSE BOX/CIRCUIT BREAKER BEFORE INSTALLATION.**

INSPECT ITEM CAREFULLY BEFORE ATTEMPTING TO INSTALL.

IF THERE IS ANY DAMAGE OR OBVIOUS DEFECT. DO NOT INSTALL.

ITEM MAY NOT BE RETURNED ONCE IT HAS BEEN INSTALLED.

NOTE: CAREFULLY UNPACK EACH PIECE IN TOP LAYER OF PACKING PRIOR TO REMOVING. RETAIN ALL PACKING MATERIAL UNTIL INSPECTION AND INSTALLATION ARE FINAL.

12. Connect driver **(N)** input neutral wire (white) to the supply neutral wire (usually white) using wire nut **(A)**.
13. Connect driver **(N)** input hot wire (black) to the supply hot wire (usually black) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
14. Connect fixture neutral wire (marked "-") to driver **(N)** output wire (black) using wire nut **(A)**.
15. Connect fixture hot wire (marked "+") to driver **(N)** output wire (red) using wire nut **(A)**.
CAUTION: Do not reverse the hot and neutral connections.
16. Make sure all wire connections are tight, then carefully tuck into the junction box.
17. Install driver **(N)** and canopy **(D)** to collar loop **(M)** and secure with collar ring **(E)**.
18. Remove protective covers **(K)** from sockets **(H)**, then install LED light source **(I)** to sockets **(H)**.
NOTE: All LED must be installed before testing or restoring power.
19. Place shades **(J)** onto LED light source **(I)**.
20. Thread rod **(O)** to the bottom of fixture body.

* * * Clean with a dry, soft cloth only. Do not use harsh abrasives or chemical agents.